




### INTERCHANGEABLE HEAD TORQUE WRENCHES

#### Features

- Interchangeable heads permit ratcheting, fixed, or open end torquing capability with adjustable torque wrench bodies.
- A push of the locking pin provides quick-change action, with a wide range of head styles to choose from.
- Micrometer Type Adjustment-ensures fast, accurate settings and changes.
- \*Part Number 800NMIMH has Dual Pin Release for added strength

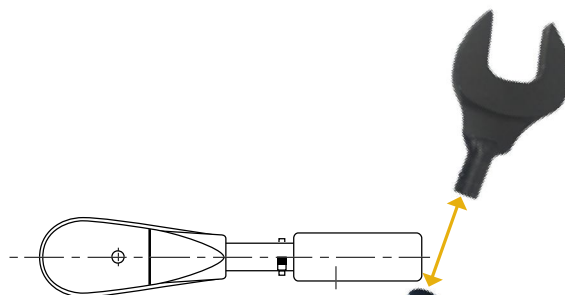

\*Note: 800NMIMH new dual pin "Z" receivers accept only dual pin interchangeable heads.

### INTERCHANGEABLE HEAD TORQUE WRENCHES - DUAL SCALE

Product Code	Grainger Part #	Shank Size	Nm Range	Incr.	English Range
50NMIMH	38A298	J	10 - 50	0.5	7.4 - 44.2
100NMIMH	38A297	J	20 - 100	0.5	14.8 - 73.8
200NMIMH	38A288	Y	40 - 200	2	29.5 - 147.5
350NMIMH	38A287	X	70 - 350	2	44.3 - 250.8
800NMIMH*	38A296	Z	150 - 800	5	110.6 - 590

### INTERCHANGEABLE HEAD TORQUE WRENCHES - SINGLE SCALE

Product Code	Grainger Part #	Shank Size	English Range	Incr.
75MFIMHSS	38A307	J	5 - 75	0.5
150MFIMHSS	38A295	Y	20 - 150	1
250MFIMHSS	38A302	Y	30 - 250	1



### SINGLE SETTING TORQUE WRENCHES

Single setting torque wrenches are designed for use on production lines and other applications where a specific torque is required for repetitive operations.

#### Features

- Factory Pre-Set models are set at the factory to the customer's specified torque setting, and are furnished with a Certificate of Calibration.
- Please specify desired torque setting when order is placed.
- Featuring a durable, non-slip cushion grip
- Uses universal round shank heads
- Audible click and feel impulse torque control mechanism
- Tamper proof torque setting for production line use
- Accuracy: ± 4% of indicated value, in direction of torque indicator, from 20% to 100% of full scale
- Meets or exceeds ASME B107.14-2004, ISO 6789



### SINGLE SETTING TORQUE WRENCHES

Product Code	Grainger Part #	Product Code	Grainger Part #	English Range	Nm Range	Shank Size	A In.	B In.	C In.	D In.	Wt. Lbs.
5T-I	38A291	5T-I-SET	38A292	10 - 50 in. lb.	1.1 - 5.6	J	6.5	0.63	0.61	1	0.35
10T-I	38A303	10T-I-SET	38A304	50 - 250 in. lb.	5.6 - 28	J	10	0.63	0.61	1	0.55
10ST-I	38A310	10ST-I-SET	38A311	60 - 300 in. lb.	6.8 - 34	J	6.2	0.68	0.86	1.4	0.75
50T-I	38A305	50T-I-SET	38A306	15 - 75 ft. lb.	20 - 102	J	11	0.68	0.96	1.4	1.4
100T-I	38A293	100T-I-SET	38A294	30 - 150 ft. lb.	41 - 203	Y	19.5	0.94	0.96	1.4	2.3
200T-I	38A299	200T-I-SET	38A301	40 - 200 ft. lb.	54 - 271	Y	23.5	0.94	0.86	1.4	2.6
300T-I	38A308	300T-I-SET	38A309	100 - 300 ft. lb.	135 - 406	X	27.7	1.12	1	1.4	3.9
600T-I	38A289	600T-I-SET	38A290	120 - 600 ft. lb.	162 - 814	Z	55	1.5	1.25	1.25	10.45

