







506-12-012

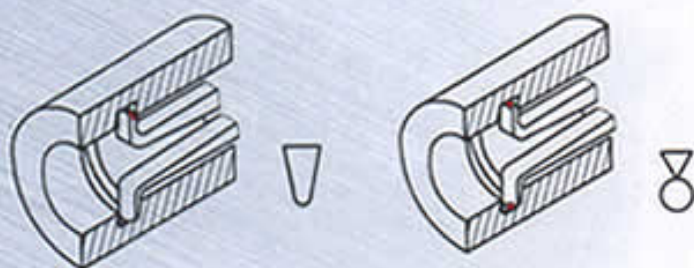

测量面形式
Measuring contact forms



507-22-012

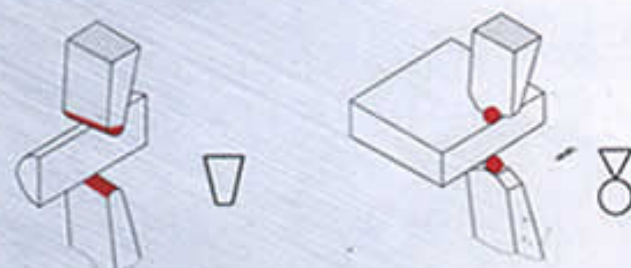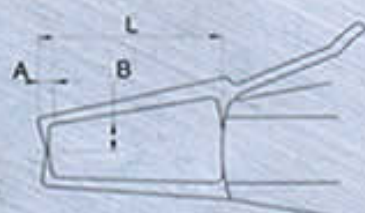

测量面形式
Measuring contact forms



特性:

电子内卡规:

适用于测量零件内孔、内孔槽及其它不易测量的内尺寸。

电子外卡规:

适用于测量外圆、外圆槽及其它不易测量的外尺寸。

- 分辨率:0.01mm/0.0005"
- 大液晶屏 40x15mm.
- 可选功能键: 1.绝对测量和相对测量转换; 2.公、英制转换; 3.开关; 4.设置公差; 5.数据保持; 6.设置绝对测量初始值; 7、8.预置绝对测量初始值。
- 默认键: 1、2、6、7、8
- 带 SPC 数据输出
- 一粒 SR44W 电池, 电源功耗<10μA, 自动断电。

Feature:

Electronic caliper gauge for inside measurements:

Electronic inside caliper gages are suited for measuring bores, internal groove, and other hard-to-read inside dimension.

Electronic caliper gauge for outside measurements:

Electronic outside caliper gages are suited for measuring grooves and other hard-to-read dimension.

- Resolution:0.01mm/0.0005"
- Large LCD screen 40×15mm.
- Function keys available: 1. Absolute and incremental measurement conversion; 2. Metric-inch conversion; 3. Power switch; 4.Tolerance set (permitting classification measurement);5. Data hold; 6. Origin data recall for absolute measurement;7. and 8. Preset origin for absolute measurement.
- Defaultkeys:1、2、6、7、8
- With SPC data output.
- One SR44W battery. Power consumption<10μA. Automatic switch off.

货号 Order No.	测量范围 Range	精度 Accuracy	L	A	B	测头 Remarks
506-11-012	5-15mm/0.2-0.6"	$\pm 0.02\text{mm}/0.0008"$	30mm	1mm	1.5mm	∇ R0.3mm
506-12-012	10-20mm/0.4-0.8"	$\pm 0.02\text{mm}/0.0008"$	30mm	1.5mm	3mm	∇ R0.3mm
506-13-012	20-30mm/0.8-1.2"	$\pm 0.02\text{mm}/0.0008"$	30mm	2mm	6.5mm	∇ R0.5mm
506-14-012	30-40mm/1.2-1.6"	$\pm 0.02\text{mm}/0.0008"$	30mm	2.5mm	9mm	∇ R0.5mm
506-15-012	40-50mm/1.6- 2"	$\pm 0.02\text{mm}/0.0008"$	30mm	2.5mm	9mm	∇ R0.5mm
506-13-112	20-30mm/0.8-1.2"	$\pm 0.02\text{mm}/0.0008"$	30mm	2mm	6.5mm	$\varnothing$ ϕ 1mm
506-14-112	30-40mm/1.2-1.6"	$\pm 0.02\text{mm}/0.0008"$	30mm	2.5mm	9mm	$\varnothing$ ϕ 1mm
506-15-112	40-50mm/1.6- 2"	$\pm 0.02\text{mm}/0.0008"$	30mm	2.5mm	9mm	$\varnothing$ ϕ 1mm
506-22-012	5-25mm/0.2- 1"	$\pm 0.03\text{mm}/0.0012"$	80mm	1mm	1.5mm	∇ R0.3mm
506-23-012	10-30mm/0.4-1.2"	$\pm 0.03\text{mm}/0.0012"$	80mm	2mm	3.5mm	∇ R0.5mm
506-24-012	20-40mm/0.8-1.6"	$\pm 0.03\text{mm}/0.0012"$	80mm	3mm	6.5mm	∇ R0.5mm
506-25-012	30-50mm/1.2- 2"	$\pm 0.03\text{mm}/0.0012"$	80mm	3mm	8.5mm	∇ R0.5mm
506-23-112	10-30mm/0.4-1.2"	$\pm 0.03\text{mm}/0.0012"$	80mm	2mm	3.5mm	$\varnothing$ ϕ 1mm
506-24-112	20-40mm/0.8-1.6"	$\pm 0.03\text{mm}/0.0012"$	80mm	3mm	6.5mm	$\varnothing$ ϕ 1mm
506-25-112	30-50mm/1.2- 2"	$\pm 0.03\text{mm}/0.0012"$	80mm	3mm	8.5mm	$\varnothing$ ϕ 1mm

Electronic caliper gauge for outside measurements

货号 Order No.	测量范围 Range	精度 Accuracy	L	A	B	测头 Remarks
507-11-012	0-10mm/ 0-0.4"	$\pm 0.02\text{mm}/0.0008"$	40mm	3mm	8mm	∇ R0.5mm
507-12-012	10-20mm/0.4-0.8"	$\pm 0.02\text{mm}/0.0008"$	40mm	3mm	8mm	∇ R0.5mm
507-13-012	20-30mm/0.8-1.2"	$\pm 0.02\text{mm}/0.0008"$	40mm	3mm	8mm	∇ R0.5mm
507-14-012	30-40mm/1.2-1.6"	$\pm 0.02\text{mm}/0.0008"$	40mm	3mm	8mm	∇ R0.5mm
507-15-012	40-50mm/1.6-2.0"	$\pm 0.02\text{mm}/0.0008"$	40mm	3mm	8mm	∇ R0.5mm
507-13-112	20-30mm/0.8-1.2"	$\pm 0.02\text{mm}/0.0008"$	40mm	3mm	8mm	$\varnothing$ ϕ 1mm
507-14-112	30-40mm/1.2-1.6"	$\pm 0.02\text{mm}/0.0008"$	40mm	3mm	8mm	$\varnothing$ ϕ 1mm
507-15-112	40-50mm/1.6- 2"	$\pm 0.02\text{mm}/0.0008"$	40mm	3mm	8mm	$\varnothing$ ϕ 1mm
507-22-012	0-20mm/ 0-0.8"	$\pm 0.03\text{mm}/0.0012"$	80mm	6.5mm	25mm	∇ R0.75mm
507-23-012	10-30mm/0.4-1.2"	$\pm 0.03\text{mm}/0.0012"$	80mm	6.5mm	25mm	∇ R0.75mm
507-24-012	20-40mm/0.8-1.6"	$\pm 0.03\text{mm}/0.0012"$	80mm	6.5mm	25mm	∇ R0.75mm
507-25-012	30-50mm/1.2- 2"	$\pm 0.03\text{mm}/0.0012"$	80mm	6.5mm	25mm	∇ R0.75mm
507-23-112	10-30mm/0.4-1.2"	$\pm 0.03\text{mm}/0.0012"$	80mm	6.5mm	25mm	$\varnothing$ ϕ 1mm
507-24-112	20-40mm/0.8-1.6"	$\pm 0.03\text{mm}/0.0012"$	80mm	6.5mm	25mm	$\varnothing$ ϕ 1mm
507-25-112	30-50mm/1.2- 2"	$\pm 0.03\text{mm}/0.0012"$	80mm	6.5mm	25mm	$\varnothing$ ϕ 1mm

